


# ZAPP PRECISION WIRE

## ALLOY 25-6MO (UNS NO8926)

QUALITY SYSTEM CERTIFIED TO ISO 9001:2015

# ZAPP



### ALLOY 25-6MO (UNS NO8926) WIRE FOR:

- \_ Armoring applications on electromechanical cables
- \_ Wirelines for down hole service applications
- \_ Shaping/shaped wire for down hole well screens

### CHARACTERISTICS

Alloy 25-6MO (UNS NO8926) is a “super austenitic” stainless steel offering excellent corrosion resistance in a wide variety of aggressive, aqueous environments. It contains about 6% molybdenum, which along with higher levels of chromium and nickel, readily enables it to replace the conventional austenitic steels such as Type 316 and Type 317. It also represents a cost-effective alternative to the higher nickel alloys in some marine, petroleum, and chemical processing environments.

The alloy offers excellent resistance to pitting and crevice corrosion. Performance in these areas is often measured using Critical Pitting Temperatures (CPT), Critical Crevice Temperatures (CCT), and Pitting Resistance Equivalent Numbers (PREN). Data\* is available to show superior values for alloy 25-6MO compared to AISI 316, AISI 317, alloy 904L, and alloy 2205. ASTM Standard Test Methods G 48 is also referenced. It covers the procedures for the determination of the resistance of various alloys to pitting and crevice corrosion.

\* Reference: Inco Alloys International publication number IAI-46-3, (INCO alloy 25-6MO) dated 1994.

FOR COMPARISON PURPOSES, PREN AND CPT NUMBERS ARE PRESENTED FOR THESE ALLOYS:

### PREN AND CPT NUMBERS\*

Alloy	PREN	CPT (°F)	CPT (°C)
316	26	72	22
alloy 2205	36	108	42
XM19	38	106	41
alloy 2507	41	143	61
alloy 28	40	129	54
25-6MO	47	149	65
27-7MO	56	176	80
MP35N®	53	183	84
C276	68	>302	>150

\*PREN = Cr + 3.3 Mo + 30N

\*CPT (°C) = 2.5 Cr + 7.6 Mo + 31.9 N - 41

### CHEMISTRY STANDARDS

UNS N08926,  
Alloy No. 1.4529,  
ASTM A580  
ASTM B649

## LIMITING CHEMICAL COMPOSITION OF ALLOY 25-6MO

Ni	Cr	Mo	Cu	N	C	Mn	S	P	Si	Fe
24.0 - 26.0	19.0 - 21.0	6.0 - 7.0	0.5 - 1.5	0.15 - 0.25	0.02 max	2.00 max	0.005 max.	0.030 max.	0.5 max.	remainder

The chemical balance (and especially the 25% nickel and the 0.20% nitrogen contents) provides significantly better resistance to chloride-ion stress corrosion cracking than lower nickel alloys such as AISI 317 stainless steel. This is illustrated quite well by the Copson U-Curve in the INCO publication IAI-46-3.

The alloy 25-6MO wire produces higher mechanical properties than AISI 316L. Tensile strengths in the order of 210/250,000 psi are achieved through cold drawing. At these strength levels, the wire is ductile and able to successfully pass the wrap test in the as drawn condition as well as the as drawn plus exposed to temperatures as high as 400°F conditions. This wrap or bend test shows no surface cracking or failure.

## PHYSICAL PROPERTIES OF ALLOY 25-6MO AT ROOM TEMPERATURE ARE AS FOLLOWS

Density	0.290 [lb/in <sup>3</sup> ] / 8.03 [g/cm <sup>3</sup> ]
Melting range	2,410 - 2,550 [°F] / 1,320 - 1,400 [°C]
Specific heat	0.12 [Btu/lb·°F] / 500 [J/kg · °C]
Electrical resistivity	480 [ohm-circ mil/ft] / 0.80 [μΩ · m]
Permeability at 200 oersted (15.9 kA/m)	< 1.01 [annealed] / < 1.01 [50% cold worked]
Young's modulus at 70 °F (21 °C)	27.27 [10 <sup>3</sup> ksi] / 188.0 [GPa]
Thermal Expansion at 200 °F (100 °C)	8.42 [in/in/°F · 10 <sup>-6</sup> ] / 15.18 [cm/cm/°C · 10 <sup>-6</sup> ]

Alloy 25-6MO is also identified as UNS N08926. Wire products are covered by ASTM B649. A number of other commercially available alloy designations are related to alloy 25-6MO through the UNS N08926 designation or through published chemistry ranges. These alternate designations or trademarks include:

- \_ INCO® alloy 25-6MO  
(trademark of Special Metals Corporation)
- \_ GD31MO (trademark of Greening Donald)
- \_ SUPA 75 (trademark of Bridon)
- \_ Cronifer® 1925hMo (trademark of Krupp VDM)
- \_ AL6XN (trademark of Allegheny Ludlum Corporation)
- \_ Phy 4529  
(trademark of Metalimphy Alloys Corporation)

Through the connecting UNS N08926 alloy designation, 25-6MO, SUPA 75, and GD31MO describe the same alloy and therefore have equivalent chemistries.

## ZAPP TECHNICAL DATA

## ALLOY CHEMISTRY

Alloy	UNS	C	Mn	Cr	Ni	Mo	Cu	N	Co	Ti	Fe
316	S31600	.08	2.0	16.0 – 18.0	10.0 – 14.0	2.0 – 3.0	-	-	-	-	bal.
2205	S32205	.03	2.0	21.0 – 23.0	4.5 – 6.5	2.5 – 3.5	-	0.18	-	-	bal.
XM19	S20910	.06	4.0 – 6.0	20.5 – 23.5	11.5 – 13.5	1.5 – 3.0	-	.20 – .40	-	-	bal.
2507	S32750	.03	1.2	25.0	7.0	4.0	-	.30	-	-	bal.
25-6MO	N08926	.02	2.0	19.0 – 21.0	24.0 – 26.0	6.0 – 7.0	.5 – 1.5	.15 – .25	-	-	bal.
27-7 MO	S31277	.02	3.0	20.5 – 23.0	26.0 – 28.0	6.6 – 8.0	.5 – 1.5	.30 – .40	-	-	bal.
MP35N®	R30035	.02	0.1	19.0 – 21.0	33.0 – 37.0	9.0 – 10.5	-	-	bal.	1.0	1.0
C276	N10276	.01	1.0	14.5 – 16.5	-	15.0 – 17.0	-	-	2.5	-	4.0 – 7.0

(Maximum values unless range specified)

## ARMOR WIRE TYPICAL TENSILE STRENGTH RANGES (KSI)

Size	316	XM19	25-6MO	27-7MO	MP35N®
.020" - .029"	230/260	250/280	245/275	255/280	275/300
.030" - .066"	225/260	245/280	240/275	255/280	275/300

## WIRELINE MINIMUM BREAK STRENGTH\*\*

Size	316	2205	XM19	2507	25-6MO	27-7MO	MP35N®	C276
.082"	1150#	1345#	1215#	1345#	1175#	1300#	1300#	1280#
.092"	1500#	1690#	1540#	1690#	1500#	1650#	1690#	1615#
.108"	2000#	2240#	2200#	2240#	2130#	2250#	2300#	2210#
.125"	2700#	2945#	3000#	2975#	2750#	3000#	3100#	2935#
.140"	3300#	3540#	3540#	3694#	3250#	3670#	3725#	3680#
.150"	3750#	3975#	4065#	4150#	3750#	4155#	4240#	4205#
.160"	4225#	4425#	4625#	4665#	4250#	4650#	4825#	4785#

(\*\* The recommended **safe working load** is 60% of minimum break strength)

## DENSITY/CORROSION

Alloy	Density (lb/in³)	Corrosion (PREN)*	CPT (°F)	CPT (°C)**
316	.287	26	72	22
2205	.278	36	108	42
XM19	.285	38	106	41
2507	.281	41	144	62
25-6MO	.290	47	149	65
27-7MO	.289	56	176	80
MP35N®	.309	53	183	84
C276	.321	68	>302	>150

\* PREN = Cr + 3.3 + 30N

\*\* CPT (°C) = 2.5 Cr + 7.6 Mo + 31.9 N - 41

**WEIGHT PER FOOT (LBS.) FOR WIRELINES**

Alloy	.082"	.092"	.108"	.125"	.140"	.150"	.160"
316	0.018	0.023	0.031	0.042	0.053	0.060	0.069
2205	0.018	0.022	0.031	0.041	0.052	0.059	0.068
XM19	0.018	0.023	0.031	0.042	0.053	0.060	0.069
2507	0.018	0.022	0.031	0.041	0.052	0.059	0.068
25-6MO	0.018	0.023	0.032	0.043	0.054	0.062	0.070
27-7MO	0.018	0.023	0.032	0.043	0.054	0.062	0.070
MP35N®	0.020	0.025	0.034	0.046	0.057	0.066	0.075
C276	0.018	0.022	0.031	0.041	0.052	0.059	0.068

**EXAMPLES OF THEORETICAL ACCEPTABLE WELL ENVIRONMENTS FOR 25-6MO WIRE\***

Chlorides	Temp °F	H <sub>2</sub> S	CO <sub>2</sub>	Pressure (PSI)	Req. Minimum Pitting Index (PI)	25-6MO (PI)	25-6MO (PREN)
18,000 ppm	300	<1 %	1 %	5,000	31.50	43.65	47
100,000 ppm	300	<1 %	10 %	9,000	31.50	43.65	47
100,000 ppm	158	6%	82 %	3,674	40.00	43.65 **	47
100,000 ppm	325	15 %	3 %	3,100	43.00	43.65 **	47
200,000 ppm	405	225ppm	18%	12,000	35.00	43.65	47
20,000 ppm	425	20ppm	10 %	15,000	35.00	43.65	47

\*\* Marginally acceptable

\* The theoretical acceptable well environments are based on the SOCRATES software. SOCRATES is a comprehensive material selection tool for oil and gas applications that selects corrosion resistant alloys (CRA) through material evaluation based on mechanical strength parameters, heat treatment/cold work and hardness limitations. The program also evaluates the characterization of the environment in terms of operating pressure, temperature, pH, H<sub>2</sub>S, chlorides, elemental sulfur, aeration, gas to oil ratio and water to gas ratio water cut. Stress corrosion cracking, hydrogen embrittlement cracking, sulfide stress cracking and resistance to pitting corrosion are also evaluated. The examples above are based on the environment listed and do not take into consideration the actual values of elemental sulfur, aeration, gas to oil ratio and water to gas ratio water cut.

**NOTE:** The information in the Socrates summary report does not represent a commitment by Honeywell InterCorr International or Zapp Precision Wire, Inc. The information contained in this document and the Socrates software is purely advisory in nature. In no event shall Honeywell InterCorr, Zapp Precision Wire, Inc., or their employees or agents have liability for damages, including but not limited to, consequential damages arising out of or in connection with any person's use or inability to use the information in this document.

$$PI = Cr + 3.3Mo + 11N + 1.5(W+Nb)$$


$$PREN = Cr + 3.3Mo + 30N$$

## NOMINAL CHEMICAL COMPOSITION COMPARISON

Chemical Element	316	2205	XM19	2507	25-6MO	27-7MO	MP35N®	C276
Fe	65.40	67.71	56.40	62.43	46.30	39.65	1.00	5.5
Mn	2.00	2.0	5.00	0.6	2.00	3.00	0.15	0.5
Ni	12.00	5.5	12.50	7.0	25.00	27.00	35.00	55.0 bal.
Co	*	*	*	*	*	*	32.90	2.0
Cr	17.00	22.0	22.00	25.0	20.00	21.75	20.00	15.5
Mo	2.50	2.5	2.25	4.0	6.50	7.25	9.75	16.0
W	*	*	*	*	*	*	*	*
Nb	*	*	0.20	*	*	*	*	*
N	*	0.12	0.30	*	0.20	0.35	*	*
*Trace								
PI	25.25	31.57	33.03	39.85	43.65	49.53	52.18	74.43

## MATERIAL SELECTION OVERVIEW

Pitting Index

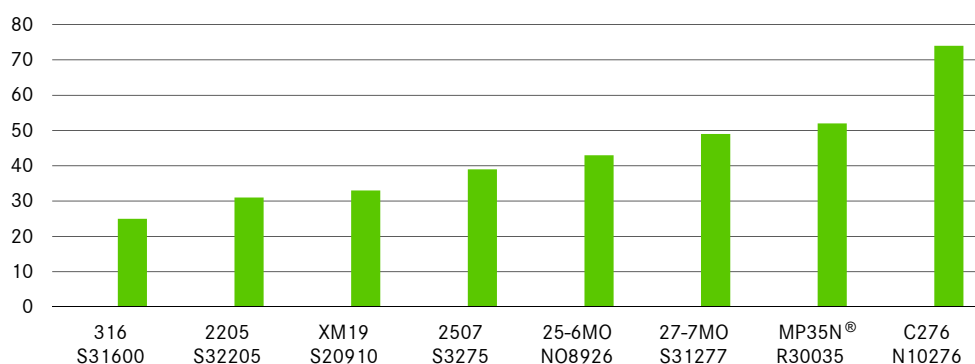

## ZAPP PRECISION WIRE STANDARDS

1. All wirelines must pass an eddy current test as part of our NDT quality assurance program.
2. All wirelines and armor wires must pass an aged wrap test as part of our ductility quality assurance program.
3. All wirelines and armor wires have full traceability.
4. All 25-6MO wirelines and armor wires are produced using shaved, defect free rod material.

## ZAPP PRECISION WIRE QUALITY

The Zapp Precision Wire technology, quality, and superior wire drawing capabilities will make the difference for critical armor wire and wireline applications.

The Zapp Precision Wire quality system is registered to ISO 9001:2015.

For additional information on this or any other Zapp Precision Wire product, please contact the Customer Service Department at 843-851-0700 or fax your inquiry to 843-851-0100, or e-mail the inquiry to [sales@zapp.com](mailto:sales@zapp.com).

## ZAPP PRECISION WIRE

WIRE | BAR | PROFILE | FLAT WIRE  
 Zapp Precision Wire, Inc.  
 475 International Circle  
 Summerville, South Carolina 29483  
 U.S.A.  
 Phone 1 843 851-0700  
 Fax 1 843 851-0010  
 Toll-free 1 888-777-3962  
[Precisionwire-usa@zapp.com](mailto:Precisionwire-usa@zapp.com)  
[www.zapp.com](http://www.zapp.com)

Further information regarding our products and locations are available in our image brochure and under [www.zapp.com](http://www.zapp.com)

The illustrations, drawings, dimensional and weight data and other information included in this data sheet are intended only for the purposes of describing our products and represent non-binding average values. They do not constitute quality data, nor can they be used as the basis for any guarantee of quality or durability. The applications presented serve only as illustrations and can be construed neither as quality data nor as a guarantee in relation to the suitability of the material. This cannot substitute for comprehensive consultation on the selection of our products and on their use in a specific application. The brochure is not subject to change control.  
 Last revision: July 2018