


ZAPP PRECISION WIRE

ALLOY C276 (UNS N10276)

QUALITY SYSTEM CERTIFIED TO ISO 9001:2015

ZAPP



ALLOY C276 (UNS N10276) WIRE FOR:

- _ Armoring applications on electromechanical cables
- _ Wirelines for down hole service applications
- _ Shaping/shaped wire for down hole well screens

CHARACTERISTICS

Alloy C276 (UNS N10276) is known for its corrosion resistance in a wide range of aggressive media. It is used in chemical processing as well as oil field applications. It offers excellent corrosion resistance in a wide variety of aggressive, downhole environments. It has exceptional resistance to sulfuric, phosphoric, and hydrochloric acid.

C-276 is one of the premier materials for recovery and handling of “sour” natural gas, which contains hydrogen sulfide and usually carbon dioxide and chlorides. The gas can be extremely corrosive to carbon and alloy steels, and may cause brittle failure of many alloys by sulfide stress cracking (hydrogen embrittlement) or stress-corrosion cracking. The high levels of nickel, chromium, and molybdenum in alloy C-276 make the alloy resistant to sour environments even at high temperatures in deep wells. The alloy is also used for tubing and a variety of other downhole and surface components.

The alloy C276 material contains about 57% nickel, 16% chromium, 16% molybdenum, and 1.0% manganese. See Table 1 for chemical composition limits. Nickel and molybdenum provide resistance to reducing media while the high chromium content offers resistance to oxidizing media. The alloy performs well in mixed acid environments, especially those containing oxidizing and reducing acids. The nickel content provides strong resistance to stress corrosion cracking and also attack by caustic media. The alloy offers excellent resistance to corrosion in seawater, brine, and high chloride environments. The chemical composition and balance of elements of the C276 alloy produces a wire material which can provide excellent service in many of the most aggressive downhole environments. It is expected to be an ideal material for acidizing wells using HCL and for high temperature geothermal applications.

TABLE 1 - LIMITING CHEMICAL COMPOSITION OF ALLOY C276, WEIGHT %

Ni	Cr	Mo	W	C	Co	Mn	Fe
bal.	14.50 - 16.50	15.00 - 17.00	3.75 - 4.50	0.01 max	2.50	1.00 max	4.00 - 7.00

CHEMISTRY STANDARDS:

- _ UNS N10276
- _ W.Nr.2.4819
- _ ASTM B 574
- _ ASME SB 574

TABLE 2 - MINIMUM BREAK LOADS FOR A 0.108" DIAMETER
WIRELINE PRODUCT

Alloy	Min. break load	Recommended safe working load
AISI 316	2000#	1200#
Alloy 2205	2240#	1344#
XM19	2200#	1320#
Alloy 2507	2240#	1344#
25-6MO	2130#	1278#
C276	2200#	1320#
27-7MO	2250#	1350#
MP35N®	2300#	1380#
C276	2210#	1326#

The C276 alloy offers excellent resistance to pitting and crevice corrosion. Relative performance in these areas is often measured using Critical Pitting Temperatures (CPT), Critical Crevice Temperatures (CCT), and Pitting Resistance Equivalent Numbers (PREN). Alloys exhibiting higher PREN values are generally found to be more corrosion resistant than those with lower PREN values. The PREN can be calculated by using several different equations based upon the chemical composition of the alloys. For the comparisons in this technical summary, the following equation was used:

$$PREN = Cr + 3.3 Mo + 30 N$$

When comparing alloys by their PREN value, it is imperative that the same equation be used for all materials to be compared, otherwise, erroneous results can occur.

PREN values are listed in Table 3, comparing C276 to a variety of alloys such as AISI 316, alloy 2205, XM19, alloy 28, 25-6MO, 27-7MO and MP35N®. Based upon these values, C276 compares quite favorably to these alloys which are currently being used extensively for armor wire and wireline applications. It should be noted that the PREN value for MP35N® doesn't reflect the true comparative corrosion resistance compared to C276. MP35N® contains about 35% cobalt. Cobalt is a critical factor in terms of corrosion resistance and break strength. However, cobalt percentages are not included in the PREN formula and thus tend to skew the relative corrosion resistance results in this instance. As a point of reference, ASTM Standard Test Methods G-48 is noted. It covers the procedures for the determination of the resistance of various alloys to pitting and crevice corrosion.

TABLE 3 -
PITTING RESISTANCE EQUIVALENCY NUMBERS (PREN)

Alloy	PREN*
AISI 316	26
Alloy 2205	36
XM19	38
Alloy 2507	41
Alloy 28	40
25-6MO	47
27-7MO	56
MP35N®	53
C276	68

*PREN = Cr + 3.3 Mo + 30N

Alloys may also be ranked by the threshold temperature at which they begin to be attacked in a given medium. Samples may be directly exposed to the medium which may induce pitting, or a crevice device may be attached which may induce crevice corrosion. The samples are exposed at increasing temperatures until corrosive attack occurs. The lowest temperature at which measurable corrosion takes place is defined as the Critical Pitting Temperature (CPT) or Critical Crevice Temperature (CCT), depending on whether or not a crevice device is attached to the sample. One test method is covered by ASTM G48. Method C is a pitting test while Method D is a crevice corrosion test. The maximum test temperature is 85°C (185°F) as the test solution becomes unstable at higher temperatures.

CPT and CCT values for some alloys are presented in Table 4 and Table 5. It is seen that alloy C276 exhibits higher values than alloy 25-6MO, 27-7MO and alloy 625.

TABLE 4 - CPT AND CCT PER ASTM G48 TEST METHODS C AND D

Alloy	Critical Pitting Temperature		Critical Crevice Temperature	
	°C	°F	°C	°F
INCOLOY® alloy 25-6MO	70	158	35	95
INCOLOY® alloy 27-7MO	>85	>185	45	113
INCONEL® alloy 625	>85	>185	35	95
alloy C-276	>85	>185	50	122

Reference: Special Metals Technical Bulletin SMC-092

The C276 alloy wire produces a tensile strength of 240/260,000 psi through cold drawing. At this strength level, the wire is ductile and able to successfully pass the wrap test in the as drawn condition as well as the as drawn plus exposed to temperatures as high as 600°F conditions. This wrap or bend test shows no surface cracking or failure. Strong resistance to stress corrosion cracking (SCC) is one of the benefits of the C276 alloy wire.

Several corrosion testing results for C276 in HCL environments may be found in Special Metals Technical Bulletin SMC – 019 (see Tables 5, 6, 7).

Material produced to the UNS N10276 chemistry ranges and manufactured into armor wire or wirelines by Zapp Precision Wire will provide an excellent quality product. Zapp Precision Wire technology, quality, and superior wire drawing capabilities will make the difference for these critical applications.

The Zapp Precision Wire quality system is registered to ISO 9001:2008. For additional information on this or any other Zapp Precision Wire, Inc. product, please contact the Customer Service Department at 843-851-0700 or fax your inquiry to 843-851-0100, or e-mail the inquiry to sales@zapp.com.

TABLE 5 - PHYSICAL PROPERTIES OF ALLOY C276 IN ANNEALED CONDITION AT ROOM TEMPERATURE ARE AS FOLLOWS

Density	0.321 [lb/in ³]/ 8.885 [g/cm ³]
Melting range	2,415 – 2,500 [°F]
Specific heat	0.102 [Btu/lb·°F]
Electrical resistivity	>739 ohms-cmil/ft.
Permeability at 200 oersted (15.9kA/m)	>1.0002
Young ´s modulus 10 ³ ksi	>29.8
Mean coefficient of Thermal expansion	75 - 200 6.2 microinches/in.-°F 24-93 11.2 x 10 ⁻⁶ m/m·k 75 – 400 6.7 microinches/in.-°F 24 – 204 12.0 x 10 ⁻⁶ m/m·k

ZAPP TECHNICAL DATA

ALLOY CHEMISTRY

Alloy	UNS	C	Mn	Cr	Ni	Mo	Cu	N	Co	Ti	Fe
316	S31600	.08	2.0	16.0 – 18.0	10.0 – 14.0	2.0 – 3.0	-	-	-	-	bal.
2205	S32205	.03	2.0	21.0 – 23.0	4.5 – 6.5	2.5 – 3.5	-	.18	-	-	bal.
XM19	S20910	.06	4.0 – 6.0	20.5 – 23.5	11.5 – 13.5	1.5 – 3.0	-	.20 – .40	-	-	bal.
2507	S32750	.03	1.2	25.0	7.0	4.0	-	.30	-	-	bal.
25-6MO	NO8926	.02	2.0	19.0 – 21.0	24.0 – 26.0	6.0 – 7.0	.5 – 1.5	.15 – .25	-	-	bal.
27-7 MO	S31277	.02	3.0	20.5 – 23.0	26.0 – 28.0	6.6 – 8.0	.5 – 1.5	.30 – .40	-	-	bal.
MP35N®	R30035	.02	0.1	19.0 – 21.0	33.0 – 37.0	9.0 – 10.5	-	-	bal.	1.0	1.0
C276	N10276	.01	1.0	14.5 – 16.5	bal.	15.0 – 17.0	-	-	2.5	-	4.0 – 7.0

(Maximum values unless range specified)

ARMOR WIRE TYPICAL TENSILE STRENGTH RANGES (KSI)

Size	316	XM19	25-6MO	27-7MO	MP35N®	C276
.020" - .029"	230/260	250/280	245/275	255/280	275/300	240/260
.030" - .066"	225/260	245/280	240/275	255/280	275/300	240/260

WIRELINE MINIMUM BREAK STRENGTH**

Size	316	2205	XM19	2507	25-6MO	27-7MO	MP35N®	C276
.082"	1150#	1345#	1215#	1345#	1175#	1300#	1300#	1280#
.092"	1500#	1690#	1540#	1690#	1500#	1650#	1690#	1615#
.108"	2000#	2240#	2200#	2240#	2130#	2250#	2300#	2210#
.125"	2700#	2945#	3000#	2975#	2750#	3000#	3100#	2935#
.140"	3300#	3540#	3540#	3694#	3250#	3670#	3725#	3680#
.150"	3750#	3975#	4065#	4150#	3750#	4155#	4240#	4205#
.160"	4225#	4425#	4625#	4665#	4250#	4650#	4825#	4785#

(** The recommended **safe working load** is 60% of minimum break strength)

DENSITY/CORROSION

Alloy	Density (lb/in³)	Corrosion (PREN)*	CPT (°F)	CPT (°C)**
316	.287	26	72	22
2205	.278	36	108	42
XM19	.285	38	106	41
2507	.281	41	144	62
25-6MO	.290	47	149	65
27-7MO	.289	56	176	80
MP35N®	.309	53	183	84
C276	.321	68	>302	>150

* PREN = Cr + 3.3 Mo + 30N

** CPT (°C) = 2.5 Cr + 7.6 Mo + 31.9 N – 41

WEIGHT PER FOOT (LBS.) FOR WIRELINES

Alloy	.082"	.092"	.108"	.125"	.140"	.150"	.160"
316	0.018	0.023	0.031	0.042	0.053	0.060	0.069
2205	0.018	0.022	0.031	0.041	0.052	0.059	0.068
XM19	0.018	0.023	0.031	0.042	0.053	0.060	0.069
2507	0.018	0.022	0.031	0.041	0.052	0.059	0.068
25-6MO	0.018	0.023	0.032	0.043	0.054	0.062	0.070
27-7MO	0.018	0.023	0.032	0.043	0.054	0.062	0.070
MP35N®	0.020	0.025	0.034	0.046	0.057	0.066	0.075
C276	0.018	0.022	0.031	0.041	0.052	0.059	0.068

EXAMPLES OF THEORETICAL ACCEPTABLE WELL ENVIRONMENTS FOR C276 WIRE IN HCL ACIDIZING ENVIRONMENTS*

Examples	Type of Acid	Inhibitor Used?	Chlorides	Temp °F	H ₂ S	CO ₂	Pressure	Req. Minimum	C276	C276
							(PSI)	Pitting Index (PI)	(PI)	(PREN)
A	15 % HCL	Yes	20,000 ppm	400	1%	10%	5,000	56	74.43	68
B	28 % HCL	Yes	150,000 ppm	450	3%	11%	5,000	70	74.43	68
C	28 % HCL	No	100,000 ppm	275	10%	10%	10,000	56	74.43	68
D	28 % HCL	No	120,000 ppm	380	20%	30%	15,000	70	74.43	68
E	15 % HCL	No	20,000 ppm	180	40%	60%	3,000	56	74.43	68
F	15 % HCL	Yes	25,000 ppm	425	3%	3%	3,000	56	74.43	68

*The theoretical acceptable well environments are based on the SOCRATES software. SOCRATES is a comprehensive material selection tool for oil and gas applications that selects corrosion resistant alloys (CRA) through material evaluation based on mechanical strength parameters, heat treatment/cold work and hardness limitations. The program also evaluates the characterization of the environment in terms of operating pressure, temperature, pH, H₂S, chlorides, elemental sulfur, aeration, gas to oil ratio and water to gas ratio water cut. Stress corrosion cracking, hydrogen embrittlement cracking, sulfide stress cracking and resistance to pitting corrosion are also evaluated. The examples above are based on the environment listed and do not take into consideration the actual values of elemental sulfur, aeration, gas to oil ratio and water to gas ratio water cut.

NOTE: The information in the Socrates summary report does not represent a commitment by Honeywell InterCorr International or Zapp Precision Wire, Inc. The information contained in this document and the Socrates software is purely advisory in nature. In no event shall Honeywell InterCorr, Zapp Precision Wire, Inc., or their employees or agents have liability for damages, including but not limited to, consequential damages arising out of or in connection with any person's use or inability to use the information in this document.

$$PI = Cr + 3.3Mo + 11N + 1.5(W+Nb)$$


$$PREN = Cr + 3.3Mo + 30N$$

NOMINAL CHEMICAL COMPOSITION COMPARISON

Chemical Element	316	2205	XM19	2507	25-6MO	27-7MO	MP35N®	C276
Fe	65.4	67.71	56.40	62.43	46.3	39.65	1.00	5.5
Mn	2.00	2.0	5.00	0.6	2.00	3.00	0.15	0.5
Ni	12.00	5.5	12.50	7.0	25.00	27.00	35.00	55.0 bal.
Co	*	*	*	*	*	*	32.90	2.0
Cr	17.00	22.0	22.00	25.0	20.00	21.75	20.00	15.5
Mo	2.50	2.5	2.25	4.0	6.50	7.25	9.75	16.0
W	*	*	*	*	*	*	*	*
Nb	*	*	0.20	*	*	*	*	*
N	*	0.12	0.30	*	0.20	0.35	*	*
*Trace								
PI	25.25	31.57	33.03	39.85	43.65	49.53	52.18	74.43

MATERIAL SELECTION OVERVIEW

Pitting Index

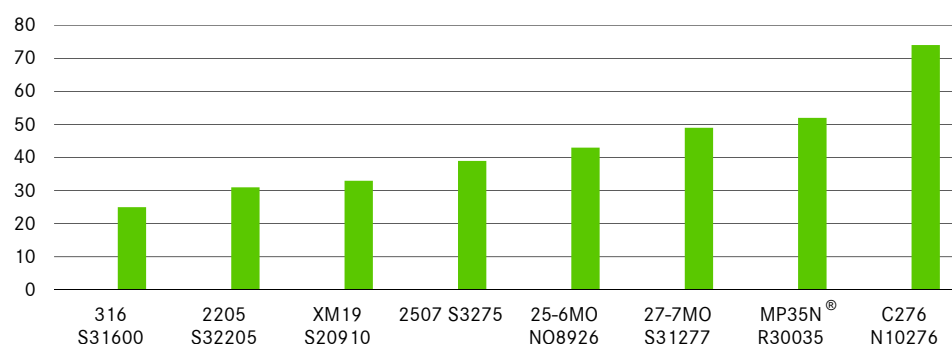

ZAPP PRECISION WIRE STANDARDS

1. All wirelines must pass an eddy current test as part of our NDT quality assurance program.
2. All wirelines and armor wires must pass an aged wrap test as part of our ductility quality assurance program.
3. All wirelines and armor wires have full traceability.
4. All C276 wirelines and armor wires are produced using shaved, defect free rod material.

ZAPP PRECISION WIRE

WIRE | BAR | PROFILE | FLAT WIRE

Zapp Precision Wire, Inc.

475 International Circle

Summerville, South Carolina 29483

U.S.A.

Phone 1 843 851-0700

Fax 1 843 851-0010

Toll-free 1 888-777-3962

Precisionwire-usa@zapp.com

www.zapp.com

ZAPP PRECISION WIRE QUALITY

The Zapp Precision Wire technology, quality, and superior wire drawing capabilities will make the difference for critical armor wire and wireline applications. The Zapp Precision Wire quality system is registered to ISO 9001:2008.

Further information regarding our products and locations are available in our image brochure and under www.zapp.com

The illustrations, drawings, dimensional and weight data and other information included in this data sheet are intended only for the purposes of describing our products and represent non-binding average values. They do not constitute quality data, nor can they be used as the basis for any guarantee of quality or durability. The applications presented serve only as illustrations and can be construed neither as quality data nor as a guarantee in relation to the suitability of the material. This cannot substitute for comprehensive consultation on the selection of our products and on their use in a specific application. The brochure is not subject to change control.

Last revision: July 2018